


灯条规格书

【ECS-C120-12V】




产品亮点

- 2835灯珠。多种芯片可选择（晶元、欧司朗、科瑞、日亚）。封装使用99.99%的金线提高LED的稳定性和使用寿命。
- 线路板采用双面压延铜；抗弯曲，承载能力大，光衰小，散热好。3M胶带，便于安装。
- IP55(滴胶防水)/ NA(纳米防水)/IP65(套管防水)/IP67(灌胶防水)可供选择。
- 欧盟CE/RoHS认证，3年质保。





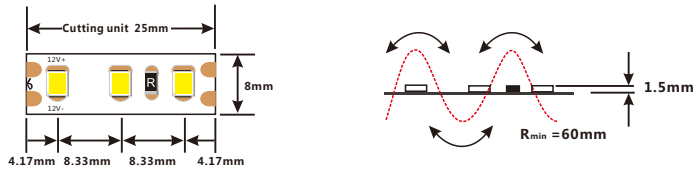









产品规格



光电参数


| | | | |
|----------|--------------|-----------|---------------------|
| 灯珠类型 灯珠数 | 2835-120 | 额定电流(A/m) | 1.2 |
| 尺寸 | 5000×8×1.5mm | 额定功率(W/m) | 13.5 |
| 剪切单元 | 25mm/3leds | 最大功率(W/m) | 14.4 |
| 电压 | 12 | 最小弯曲直径 | Φ60mm |
| 铜箔 | 2OZ | 防护等级 | IP20/IP55/IP65/IP67 |

| 品名 | 色温/颜色 | 显指 | 流明值/米 | 光效 |
|--------------|---|-----|-------|-----|
| ECS-C120-12V |  1900K | 80+ | 1184 | 82 |
| ECS-C120-12V |  2300K | 80+ | 1304 | 91 |
| ECS-C120-12V |  2700K | 80+ | 1349 | 94 |
| ECS-C120-12V |  3000K | 80+ | 1397 | 91 |
| ECS-C120-12V |  3500K | 80+ | 1424 | 99 |
| ECS-C120-12V |  4000K | 80+ | 1499 | 104 |
| ECS-C120-12V |  5000K | 80+ | 1499 | 104 |
| ECS-C120-12V |  6000K | 80+ | 1499 | 104 |
| ECS-C120-12V |  2700K | 90+ | 938 | 69 |
| ECS-C120-12V |  3000K | 90+ | 1029 | 76 |
| ECS-C120-12V |  3500K | 90+ | 1143 | 85 |
| ECS-C120-12V |  4000K | 90+ | 1143 | 85 |

1. 数据公差范围是10%。
2. 依据 IES LM-79-08 输出数据。
3. 依据 IP20/1米测试数据。
4. IP防护工艺会导致尺寸、色温和光通量变化。

Packing

1. Non- brand of IP20/IP55/IP65/IP67.

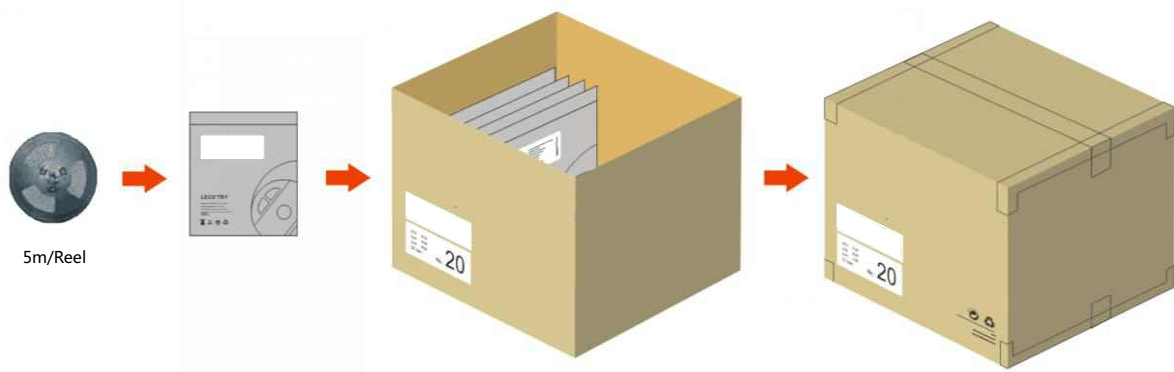

| Model | Static Bag Size | Volume/box (PCS) | Net Weight/box (Kg/box) | Gross Weight/box (Kg/box) | Carton Specifications (LxWxH, Unit: mm) | Per Box Volume (m ³) |
|--------------|-----------------|------------------|-------------------------|---------------------------|---|----------------------------------|
| ECS-C120128N | 262×243×0.14mm | 60 | 6.96 | 7.64 | 410×410×260 | 0.044 ³ |
| ECS-C120128G | 262×243×0.14mm | 60 | 10.92 | 11.66 | 410×410×260 | |
| ECS-C120128T | 262×243×0.14mm | 50 | 14.35 | 15.35 | 410×410×260 | |
| ECS-C120128S | 262×243×0.14mm | 50 | 20.35 | 21.35 | 410×410×260 | |